


# CADDY MACROFIX, Stainless Steel



- Category II noise reduction according to DIN EN ISO 3822-1
- Compliant for sound insulation design according to DIN 4109
- Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1:2010-01

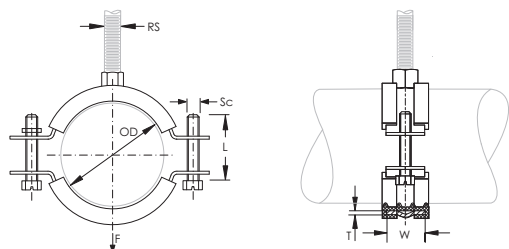

Material: Stainless Steel 316 (EN 1.4401), EPDM-SBR Rubber

Finish: Electropolished

Temperature: -50 to 110 °C

Part Number	Article Number	Outer Diameter OD	Pipe Size	NB/DN	Rod Size RS	Width W	Thickness T	Screw Diameter Sc	Screw Length L	Static Load F
MXE015S6	595595	12 – 15 mm	1/4"	8	M8	20 mm	1,5 mm	M6	20 mm	1 000 N
MXE019S6	595600	15 – 19 mm	3/8"	10	M8	20 mm	1,5 mm	M6	20 mm	1 000 N
MXE024S6	595610	20 – 24 mm	1/2"	15	M8	20 mm	1,5 mm	M6	20 mm	1 000 N
MXE030S6	595620	25 – 30 mm	3/4"	20	M8	20 mm	1,5 mm	M6	20 mm	1 000 N
MXE037S6	595630	32 – 37 mm	1"	25	M8	20 mm	1,5 mm	M6	20 mm	1 000 N
MXE045S6	595640	40 – 45 mm	1 1/4"	32	M8	20 mm	1,5 mm	M6	25 mm	1 000 N
MXE049S6	595645	44 – 49 mm	-	-	M8	20 mm	1,5 mm	M6	25 mm	1 300 N
MXE053S6	595650	48 – 53 mm	1 1/2"	40	M8	20 mm	1,5 mm	M6	25 mm	1 300 N
MXE058S6	595660	54 – 58 mm	-	-	M8	20 mm	1,5 mm	M6	25 mm	1 300 N
MXE063S6	595670	59 – 63 mm	2"	50	M8	20 mm	1,5 mm	M6	25 mm	1 300 N
MXE064S6	595675	62 – 64 mm	-	-	M8	25 mm	2,0 mm	M6	25 mm	1 300 N
MXE073S6	595680	68 – 73 mm	-	-	M8	25 mm	2,0 mm	M6	25 mm	1 300 N
MXE080S6	595690	75 – 80 mm	2 1/2"	65	M8	25 mm	2,0 mm	M6	25 mm	1 300 N
MXE086S6	595695	82 – 86 mm	-	-	M8	25 mm	2,0 mm	M6	25 mm	1 300 N
MXT091S6	595700	89 – 91 mm	3"	80	M10	25 mm	2,0 mm	M6	25 mm	1 300 N
MXT103S6	595710	95 – 103 mm	-	-	M10	25 mm	2,0 mm	M6	25 mm	1 300 N
MXT116S6	595720	108 – 116 mm	4"	100	M10	25 mm	2,5 mm	M6	25 mm	2 200 N
MXT127S6	595730	121 – 127 mm	-	-	M10	25 mm	2,5 mm	M6	25 mm	2 200 N
MXT135S6	595740	129 – 135 mm	-	-	M10	25 mm	2,5 mm	M6	25 mm	2 200 N



Part Number	Article Number	Outer Diameter OD	Pipe Size	NB/DN	Rod Size RS	Width W	Thickness T	Screw Diameter Sc	Screw Length L	Static Load F
MXT141S6	595750	135 – 141 mm	5"	125	M10	25 mm	2,5 mm	M6	25 mm	2 200 N
MXT162S6	595755	159 – 162 mm	–	–	M10	25 mm	2,5 mm	M6	25 mm	2 200 N
MXT168S6	595760	165 – 168 mm	6"	150	M10	25 mm	2,5 mm	M6	25 mm	2 200 N
MXT202S6	595770	198 – 202 mm	–	–	M10	30 mm	3,0 mm	M8	25 mm	2 500 N
MXT215S6	595775	210 – 215 mm	–	–	M10	30 mm	3,0 mm	M8	25 mm	2 500 N
MXT220S6	595780	216 – 220 mm	8"	200	M10	30 mm	3,0 mm	M8	25 mm	2 500 N

Lining is EPDM rubber.

**WARNING**

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at [erico.pentair.com](http://erico.pentair.com) and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2018 Pentair All rights reserved

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

