


Mechanical

RUBBER LINED PIPE CLAMPS

SUPERFIX EZ LIGHT DUTY

FEATURES

- Includes easy closing mechanism
- Category II noise reduction according to DIN EN ISO 3822-1
- Compliant for sound insulation design according to DIN 4109
- Reaction-to-fire classification is "E" in compliance with |DIN EN 13501-1:2010-01

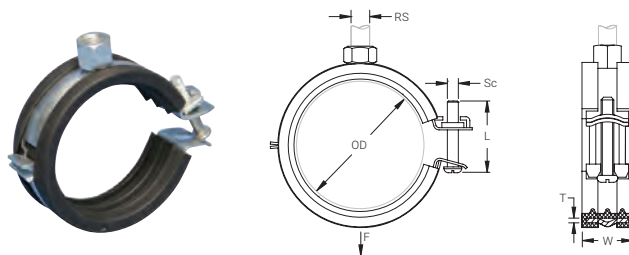

Material: EPDM-SBR Rubber, Steel

Finish: Electrogalvanized

Color: Black

Temperature: -50 to 110 °C

Part Number	Article Number	Outer Diameter	Pipe Size	NB/DN	Rod Size	Width	Thickness	Screw Diameter	Screw Length	Static Load
SXZ014	401214	12 – 14 mm	1/4"	8	M8	20 mm	1 mm	M5	25 mm	200 N
SXZ019	401215	15 – 19 mm	3/8"	10	M8	20 mm	1 mm	M5	25 mm	200 N
SXZ023	401216	21 – 23 mm	1/2"	15	M8	20 mm	1 mm	M5	25 mm	200 N
SXZ028	401217	25 – 28 mm	3/4"	20	M8	20 mm	1 mm	M5	25 mm	200 N
SXZ035	401218	32 – 35 mm	1"	25	M8	20 mm	1 mm	M5	25 mm	300 N
SXZ043	401219	40 – 43 mm	1 1/4"	32	M8	20 mm	1 mm	M5	25 mm	300 N
SXZ049	401220	44 – 49 mm	1 1/2"	40	M8	20 mm	1 mm	M5	25 mm	400 N
SXZ055	401221	50 – 55 mm			M8	20 mm	1 mm	M5	25 mm	500 N
SXZ061	401222	57 – 61 mm	2"	50	M8	20 mm	1 mm	M5	25 mm	500 N

Lining is EPDM rubber.

SUPERFIX 243 M8

FEATURES

- Includes easy closing mechanism
- Category II noise reduction according to DIN EN ISO 3822-1
- Compliant for sound insulation design according to DIN 4109
- Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1:2010-01



Material: EPDM-SBR Rubber, Steel

Finish: Electrogalvanized

Color: Black

Temperature: -50 to 110 °C

Part Number	Article Number	Outer Diameter	Pipe Size	NB/DN	Rod Size	Width	Thickness	Screw Diameter	Screw Length	Static Load
SXE014	400055	12 – 14 mm	1/4"	8	M8	20 mm	1.5 mm	M6	25 mm	1,000 N
SXE019	400056	15 – 19 mm	3/8"	10	M8	20 mm	1.5 mm	M6	25 mm	1,000 N
SXE023	400057	21 – 23 mm	1/2"	15	M8	20 mm	1.5 mm	M6	25 mm	1,000 N
SXE028	400058	26 – 28 mm	3/4"	20	M8	20 mm	1.5 mm	M6	25 mm	1,000 N
SXE035	400059	32 – 35 mm	1"	25	M8	20 mm	1.5 mm	M6	30 mm	1,000 N
SXE043	400060	40 – 43 mm	1 1/4"	32	M8	20 mm	1.5 mm	M6	30 mm	1,000 N
SXE049	400061	44 – 49 mm			M8	20 mm	1.5 mm	M6	30 mm	1,300 N
SXE052	400062	48 – 52 mm	1 1/2"	40	M8	20 mm	1.5 mm	M6	30 mm	1,300 N
SXE058	589310	54 – 58 mm			M8	20 mm	2.0 mm	M6	30 mm	1,300 N
SXE061	589320	57 – 61 mm	2"	50	M8	20 mm	2.0 mm	M6	30 mm	1,300 N

Lining is EPDM rubber.