

Starfix is easy to put up



«Our target is always to create products that optimally meet the needs of users.»

SCHÄNIS


Starfix

The flexible tube clamp for all applications and types of pipe
(also insulated)

Advantages of Starfix

- Open in the choice of different assembly systems
- The complete tube range from 50 to 160 mm can be covered by two designs
- Reduction of the stock holding and assembly times
- Comifix drive-in part for installation in soil or lean concrete

Advantages of Starshift

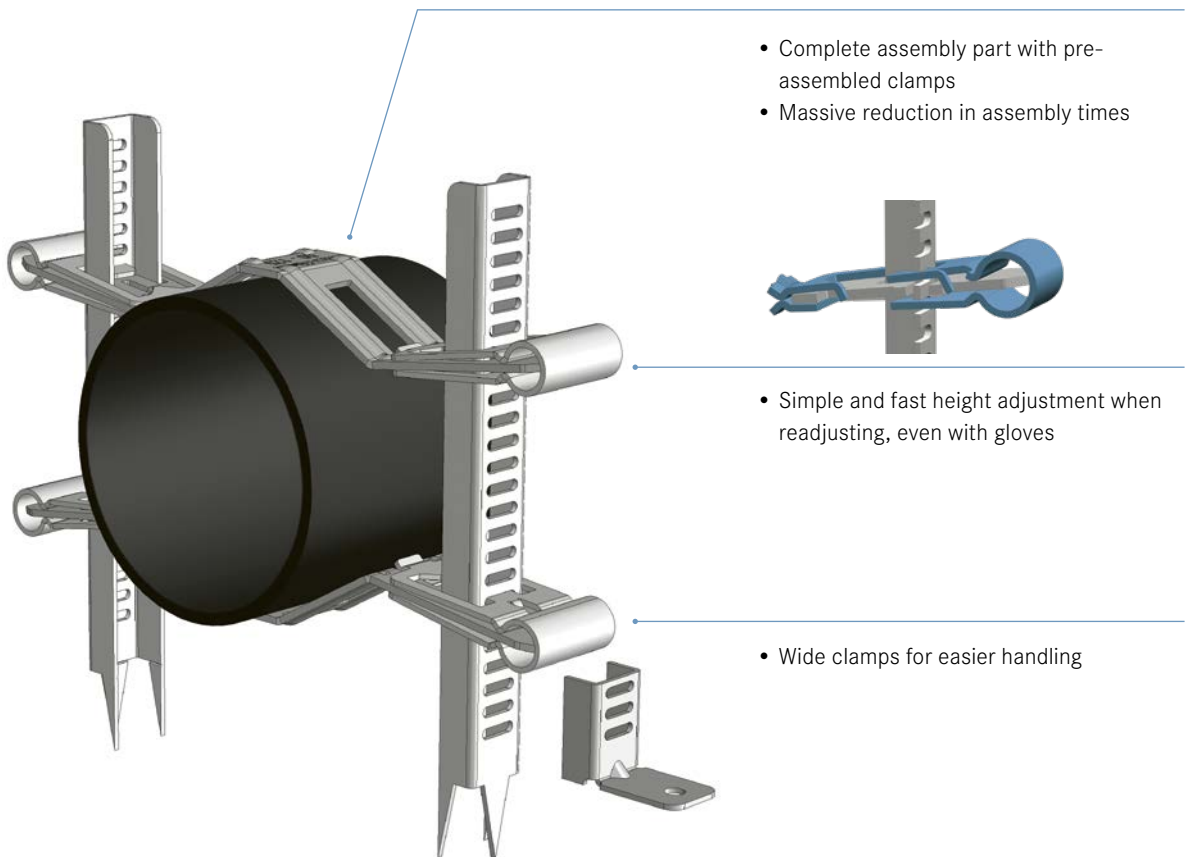

Starfix fittings

STARFIX FITTINGS WITH GALVANIZED FOOT

Part No.	Pipe-ø in mm	Foot length in mm	Foot shape
5278.16	50-125	160	with point
5278.18	50-125	180	with point
5278.20	50-125	200	with point
5278.24	50-125	240	with point
5278.30	50-125	300	with point
5278.40	50-125	400	with point

5280.16	50-125	160	curved
5280.20	50-125	200	curved
5280.24	50-125	240	curved
5280.30	50-125	300	curved
5280.40	50-125	400	curved

5282.30	110-160	300	with point
5282.40	110-160	400	with point

5284.30	110-160	300	curved
5284.40	110-160	400	curved

52###.##.1 With clamping band instead of the second Starshift-strap


Box with 25 sets

SET OF STARFIX FITTINGS WITH FOOT STAINLESS

Part No.	Pipe-ø in mm	Foot length in mm	Foot shape
5279.16	50-125	160	with point
5279.18	50-125	180	with point
5279.20	50-125	200	with point
5279.24	50-125	240	with point
5279.30	50-125	300	with point
5279.40	50-125	400	with point

52###.##.1 With clamping band instead of the second Starshift-strap

Box of 25 sets

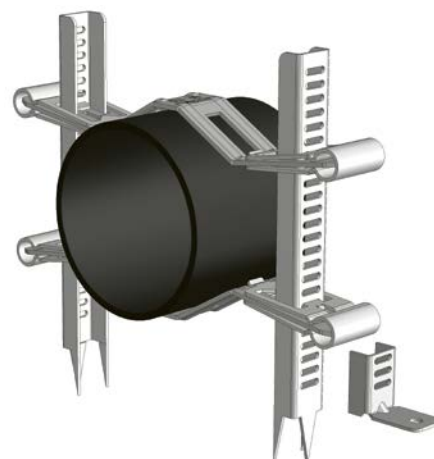


Set of straps

Consisting of:

2 Starshift straps

2 feet (with point or curved)

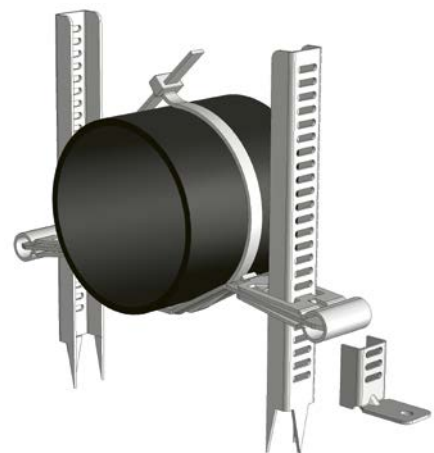

Tension band

Consisting of:


1 Starshift strap

2 feet (with point or curved)

1 clamping band

Varioplate


Advantages of Varioplate

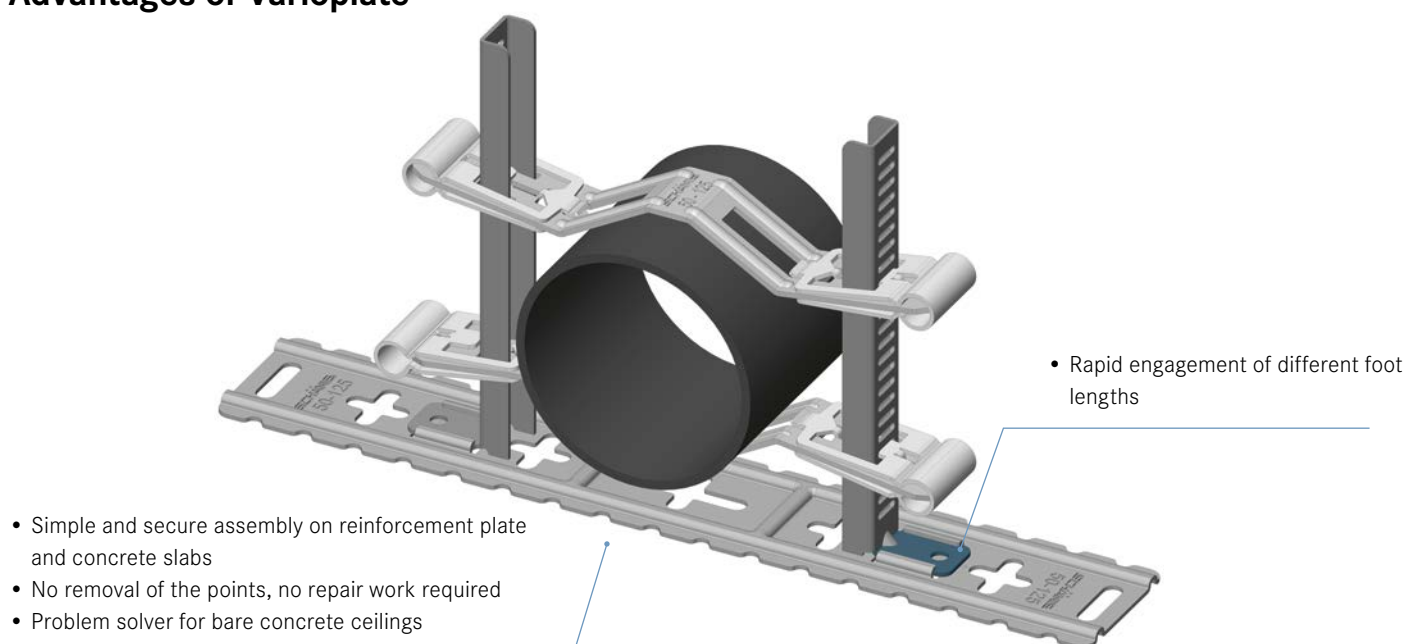

STARFIX-VARIOPLATE

Part No.	Designation	Type
5195	Starfix-Varioplate	(Type 1) for 50–125 mm can be combined with the set of Part No 5280.##
5196	Starfix-Varioplate	(Type 2) for 110–160 mm can be combined with the set of Part No 5284.##


Box of 25 parts

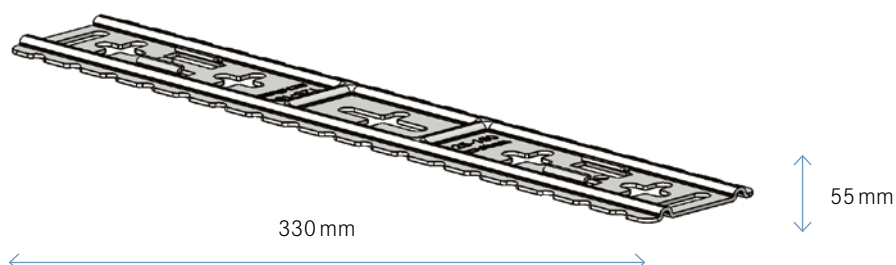

Comifix

Advantages of Comifix

- Drive-in part can be combined with Varioplate types 1 and 2
- Starfix components can also be used with Comifix in the sewerage area (soil/lean concrete)
- Foot lengths from 160 to 600 mm can be combined freely
- Lateral offset up to max. 160 mm
- Tool-less locking with 2 wing bolts
- Horizontal and vertical versions

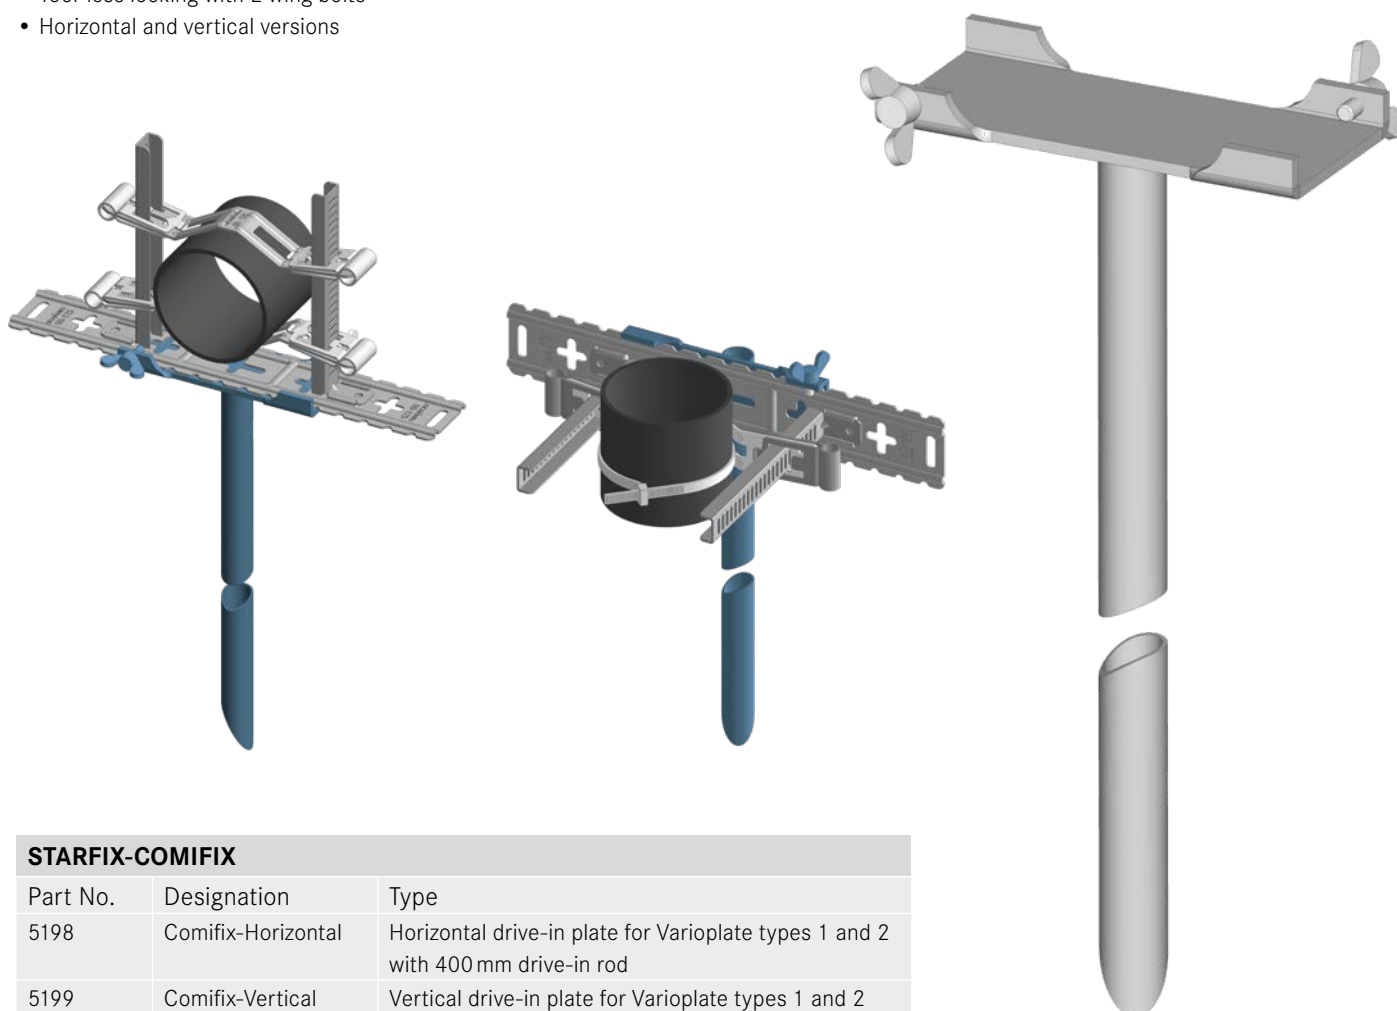

STARFIX-COMIFIX

Part No.	Designation	Type
5198	Comifix-Horizontal	Horizontal drive-in plate for Varioplate types 1 and 2 with 400 mm drive-in rod
5199	Comifix-Vertical	Vertical drive-in plate for Varioplate types 1 and 2 with 800 mm drive-in rod

Box of 25 parts

Accessories

Individual parts

STARSHIFT BRACKET	Part No.	Pipe-ø in mm	Type/foot length in mm	Material	Parts/box
	5200	50–125	Type 1	Galvanized	50
	5210	110–160	Type 2		
	5220	160–315	Type 3	Untreated	
FOOT WITH POINT					
	51##.16		160	Galvanized: 5189 STAINLESS: 5190	50
	51##.18		180		
	51##.20		200		
	51##.24		240		
	51##.30		300		
	51##.40		400		
	5189.50		500	Untreated	20
	5189.60		600		
CURVED FOOT					
	5191.16		160	Galvanized	50
	5191.20		200		
	5191.24		240		
	5191.30		300		
	5191.40		400		
	5191.50		500	Galvanized	20
	5191.60		600		
CLAMPING BAND					
	5193	50–125	500	Galvanized	25
	5194	110–160	750		
VARIOPLATE					
	5195	50–125	Type 1	Galvanized	25
	5196	110–160	Type 2		

For further information

STS Systemtechnik, Schänis GmbH
Feld 9, CH-8718 Schänis

Tel. +41 55 619 68 00

info@schaenis.com

www.schaenis.com

An SAG Enterprise since 1924

