

Mixing valves

20-50 Vexve Termomix D


Properties



Body:	cast-iron
Sleeve:	Brass
Cover:	aluminium
Shaft:	Brass
Shaft gasket (two O-rings):	EPDM
Turning angle:	90 degrees
Torque:	0,2 Nm
Motorisation:	standard
Suitable actuators:	Belimo, Ouman, Seltron, Evenes, Automix, Vexve

Operating conditions

Max operating pressure:	1,0 MPa (10 bar)
Max operating temperature:	110 °C

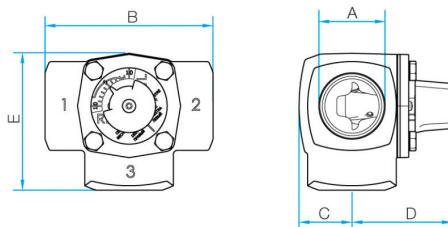

Title	Product no.	HPAC code	RSK	EAN	Kvs	A	B mm	C mm	D mm	E mm	Kg
Termomix D 20	1660000	4023072	4905075	641873 312320 2	13	20 - Rp 3/4"	110	32	67	92	1,7
Termomix D 25	1660002	4023073	4905076	641873 312325 7	17	25 - Rp 1"	112	32	67	94	1,8
Termomix D 32	1660004	4023074	4905077	641873 312332 5	24	32 - Rp 1 1/4"	127	36	70	100	2,4
Termomix D 40	1660006	4023075	4905078	641873 312340 0	31	40 - Rp 1 1/2"	127	40	73	101	2,7
Termomix D 50	1660008	4023076	4905079	641873 312350 9	41	50 - Rp 2"	135	48	80	105	4,1